



THERMODYNAMICS
QUALITY HEATING PRODUCTS

**FAN COIL
REVERSO**

REVERSO

FS / SM / HW / BT

Quiet operation 20 dB (A) • Only 12 cm thick • Dc Inverter



X & X THERMIKI LTD

Nicosia: 38A Athalassas Avenue, 2019 Strovolos Tel. +357 22 388850 // Mob +357 99 622366

Paphos: 164A Mesogi Avenue, 8280 Paphos Tel. +357 26 653948 // Fax

+357 26 652029 ce@thermo-dynamics.com.cy

www.thermodynamics.com.cy



REVERSO

FS

DC Inverter FS floor/ceiling fan coil
(FLOOR STANDING)

	FS200	FS400	FS600	FS800
Ψυκτική ισχύς (KW)	0.88	1.81	2.7	3.38
Θερμική ισχύς (KW)	1.1	2.4	3.2	4.23
Θερμική ισχύς (KW) / 70°C	2.33	4.94	6.51	8.61
Ροή αέρα (min-max) (m3/h)	80-180	155-315	240-450	310-540
Ισχύς εισόδου (min-max) (W)	3-12	4-11	5-14	8-17
Στάθμη ηχητικής πίεσης (SPL)db(A)	20	20	22	23
Μήκος (mm)	681	873	1065	1257
Ύψος (mm)	553	553	553	553
Βάθος (mm)	120	120	120	120
Τάση (V/Hz)	220/50	220/50	220/50	220/50



REVERSO

SM

Floor fan coil DC Inverter low profile
SM (SMALL)

	SM200	SM400	SM600	SM800
Ψυκτική ισχύς (KW)	0.58	1.1	1.68	2.39
Θερμική ισχύς (KW)	0.87	1.62	2.41	3.3
Θερμική ισχύς (KW) / 70°C	1.96	3.56	5.18	6.91
Ροή αέρα (min-max) (m3/h)	75-170	150-305	230-430	300-520
Ισχύς εισόδου (min-max) (W)	3-12	4-11	5-14	8-17
Στάθμη ηχητικής πίεσης (SPL)db(A)	20	20	22	23
Μήκος (mm)	681	873	1065	1257
Ύψος (mm)	383	383	383	383
Βάθος (mm)	120	120	120	120
Τάση (V/Hz)	220/50	220/50	220/50	220/50




REVERSO

HW

Wall Fan coil DC Inverter
HW (HIGH WALL)

	HW400	HW600	HW800
Ψυκτική ισχύς (KW)	1.2	1.7	2.45
Θερμική ισχύς (KW)	1.68	2.45	4.31
Θερμική ισχύς (KW) / 70°C	3.67	5.27	6.95
Ροή αέρα (min-max) (m3/h)	155-315	240-250	310-540
Ισχύς εισόδου (min-max) (W)	4-11	5-14	8-17
Στάθμη ηχητικής πίεσης (SPL)db(A)	20	22	23
Μήκος (mm)	873	1065	1257
Ύψος (mm)	383	383	383
Βάθος (mm)	120	120	120
Τάση (V/Hz)	220/50	220/50	220/50

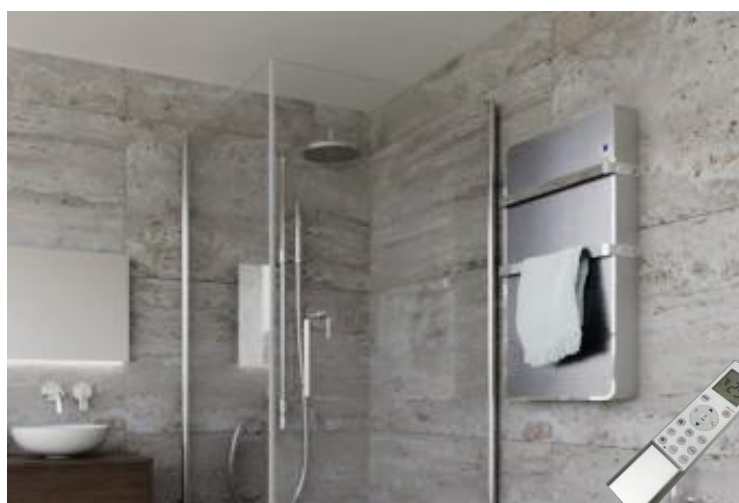

REVERSO

BT

Bathroom wall fan coil DC Inverter BT
(BATH)

	BT200	BT400
Ψυκτική ισχύς (KW)	0.43	1.2
Θερμική ισχύς (KW)	0.68	1.45
Θερμική ισχύς (KW) / 70°C	0.88	2.94
Ροή αέρα (min-max) (m3/h)	72-133	120-225
Ισχύς εισόδου (min-max) (W)	4-9	4-11
Στάθμη ηχητικής πίεσης (SPL)db(A)	20	20
Μήκος (mm)	457	565
Ύψος (mm)	798	1100
Βάθος (mm)	120	120
Τάση (V/Hz)	220/50	220/50





- Additional touch thermostat that can be integrated into the unit or mounted on the wall.
- With WiFi function and App for remote control
- Weekly programming
- Ability to control 1 unit or multiple units up to 200
- Create zones per floor or network of units according to user preferences

Technical Characteristics

1. The thinnest fan coil, only 12 cm thick
2. DC Inverter technology
3. Quiet operation of just 20 dB(A)
4. Cooling / Heating / Dehumidifying / Air Cleaning Functions
5. Modern flat design (Full Flat)
6. Front panel with unbreakable glass
7. Stainless steel filters for indefinite life
8. Tangential aluminum fan for greater efficiency
9. Low power consumption of only 4W
10. Color (standard) silver
11. Adjustable aluminum grilles
12. 8 speed control programs
13. Double blind for optimal air diffusion in the room
14. They have a left hydraulic connection and a right electrical connection
15. Includes LED display and remote control (thermostat not required/can be installed extra if desired by user)
Connection depending on the model
16. 2-pipe or 4-pipe can be connected (depending on the model)

INVERTER
TECHNOLOGY

A++

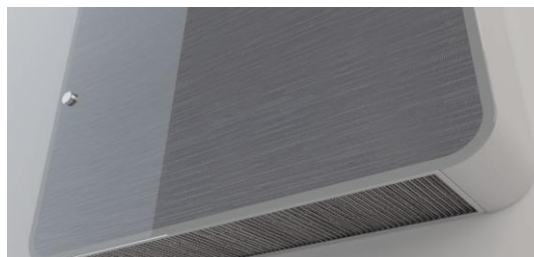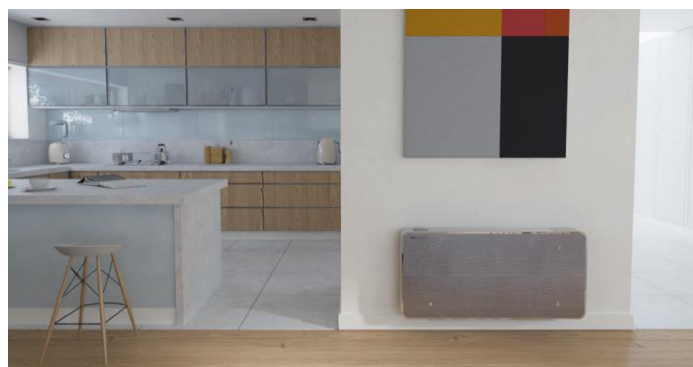

THERMODYNAMICS
QUALITY HEATING PRODUCTS

www.thermodynamics.com.cy

X & X THERMIKI LTD

Nicosia: 38A Athalassas Avenue, 2019 Strovolos Tel. +357 22

388850 // Mob +357 99 622366

Paphos: 164A Mesogi Avenue, 8280 Paphos Tel. +357 26

653948 // Fax +357 26 652029

ce@thermo-dynamics.com.cy