


BASIC INFORMATION ABOUT THE PRODUCT



- As many as 36 models differing in heating power (9, 11, 14, 16, 19 and 25 kW), glazing (straight or corner) and door opening method (traditional or lifted up).
- Possibility of any modification of the glazing and selecting the Decor, curved glass or double glazing option.
- Inserts made of high-quality P265GH boiler steel, which is resistant to continuous operation at elevated temperatures. A reinforced door profile was used.
- Production is carried out using a modern fleet of machines: welding robots, press brakes, laser cutting machines.
- It meets restrictive exhaust emission standards and the ECODSIGN directive thanks to the use of an exhaust gas after-combustion system and high efficiency.
- The innovative ventilated handle protects against burns. Suitable for houses with heat recovery.
- A built-in intake with a damper allows for smooth, integrated regulation of the amount of air supplied.
- The air curtain provides a „clean glass“ effect, and easy cleaning is provided by a cast iron grate with a removable ash container.

| | |
|--|-------------|
| Nominal power [kW] | 19 |
| Heating load range [kW] | 9,5-24 |
| Thermal efficiency [%] | 81 |
| CO emission (at 13% O2) [g/m3] | 0,029 |
| Pollen emission [g/m3] | 1,200 |
| Average fuel consumption [kg/h] | 6 |
| Recommended dimensions of outlet grilles [cm2] | 1330-1520 |
| Recommended dimensions of inlet grilles [cm2] | 760-1240 |
| Glass dimensions [mm] | 900x415x375 |
| Flue diameter [mm] | 217 |
| Inlet diameter [mm] | 150 |
| Weight [kg] | 200 |
| Efficiency factor | 108,5 |



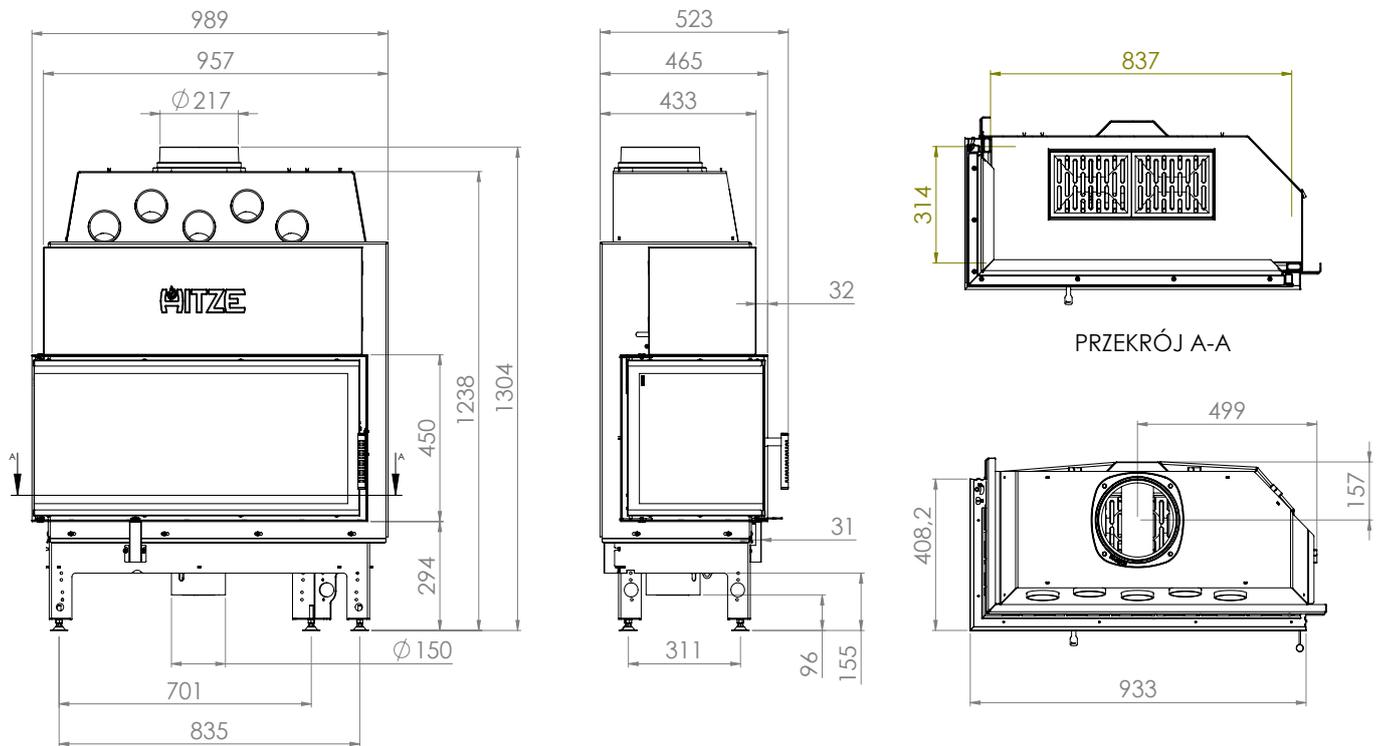

ALBERO

AL19.LHD